








CHEMICAL INJECTORS

	Part #	Discription
	WA20-155	<p>FOAM NOZZLE KIT: Simply couple to the end of your wand , insert strainer end into chemical container and you can cover the work in a thick rich foam. (Foaming type soap must be used) 1/4" male coupler</p>
	WA20-168	<p>HIGH PRESSURE SOAP KIT: High pressure soap injector is designed to work on the intake side of the pump. Generally used on hot units , it allows chemical to be applied while the machine is working at high pressure. 5/8F x 5/8M Garden hose fittings</p>
	WA20-131 WA20-136	<p>LOW PRESSURE SOAP KIT: Low pressure soap injector & spray tip. This style injector is designed to work downstream of the pump allowing chemical to be applied only when the low pressure tip is used. 3/8"M & 3/8"F quick coupler</p>



TRIGGER GUNS

	Part #	Discription
	WA20-1000	<p>STANDARD TRIGGER GUN: Pistol grip gun. Stainless steel , brass and high impact polymer. Max. 12 gpm , 4500 psi , 300F Used on all models except 4000psi model 3/8"F x 1/4"F</p>
	WA20-1002	<p>INLINE TRIGGER GUN: Stainless steel, brass and high impact polymer. Max. 12 gpm , 4000 psi , 300F Used on flat surface cleaner and ideal for long wands 3/8"F x 1/4"F</p>
	WA20-1010	<p>HIGH PRESSURE TRIGGER GUN: Pistol grip gun. Stainless steel, brass and high impact polymer. Max. 10.5 gpm , 4050 psi , 320F Used on 4000 psi models. 3/8"F x 1/4"F</p>


HOSES

	Part #	Discription
	WA15-130 WA15-130-1 WA15-131 WA15-131-1 WA15-140 WA15-140-1	HIGH PRESSURE HOSE KITS: High pressure washer hose specifically made to handle both hot and cold water applications. Working pressure 3000psi @ 200F 30Ft hose assembly 30Ft hose assembly complete with quick couplers 50Ft hose assembly 50Ft hose assembly complete with quick couplers 100Ft hose assembly 100Ft hose assembly complete with quick couplers
	WA15-160	DRAIN CLEANING KIT: This kit makes pipe cleaning-simple and easy. The specially designed nozzle will jet its way down a pipe while cleaning away debris in front of it. Kit comes c/w 30Ft of 1/8in eurathane covered pressure hose , nozzle & coupler.
	WA20-152	WATER SUCTION KIT: Make yourself completely mobile with a WA20-152. Draw water from a pond , creek , lake or even drums of water. Comes complete with 25ft of HD 3/4in hose , suction strainer and check valve.
	WA20-151-X.X	SAND BLAST KIT: Substantially increase your cleaning applications with this sand blast kit. Wet sandblasting is superior with its elimination of warping thin metals and dust-free environment. Made of premium tungston carbide to resist wear. Please specify machine so proper orifice can be sized.


QUICK COUPLERS

	Part #	Discription
	WA20-070 WA20-080 WA20-090 WA20-100	MALE + FEMALE BRASS QUICK COUPLERS: 1/4" male quick coupler 1/4" female quick coupler 3/8" male quick coupler 3/8" female quick coupler REPLACEMENT O-RINGS: 1/4in Coupler WW20-081H 3/8in Coupler WW20-101H
	WA20-110 WA20-111 WA20-112 WA20-113	MALE + FEMALE STEEL PLATED PLUGS: 1/4" female plug 1/4" male plug 3/8" female plug 3/8" male plug



ROTORY NOZZLES and SPRAY TIPS

	Part #	Discription
	WA20-195	<p>ROTORY NOZZLE: Turn the power of a blast nozzle into the use of a fan nozzle, but retain the impact. Excellent for cleaning concrete. Model WA20-195 for use only on WC2025G gas model.</p> <p>Rated for 2300PSI at 105F temp max 1/4" Female inlet</p>
	WA20-190-X.X	<p>ROTORY NOZZLE: Same as above rotory nozzle. Model WA20-190 for use on any unit under 3000psi Rated for 3200PSI at 195F temp max 1/4" Female inlet Please specify machine so proper orifice can be sized</p>
	WA20-158-X.X	<p>ROTORY NOZZLE: Same as above rotory nozzle. Model WA20-158 for use on any machine. Rated for 5000PSI at 212F temp max 1/4" Female inlet Please specify machine so proper orifice can be sized.</p>
	WW16-XXXX	<p>PRESSURE TIPS: Water Wacker colour coded for different spray angles. High pressure stainless steel ,with quick disconnect nipple. Please refer to tip chart for proper nozzle size.</p> <p>1/4" quick connect plug</p>
	WW16-4065C	<p>SOAP NOZZLE: Black brass quick connect soap nozzle. Used with all foamers and soap injectors</p> <p>1/4" quick connect plug</p>


PRESSURE GAUGE

	Part #	Discription
	WW5000PSI	<p>PRESSURE GAUGE: Glycerine filled pressure gauge. Stainless steel body. 1/4in mpt bottom mount , 5000psi.</p> <p>Adaptor SA5502-4-2 needed SA5502-4-4</p>



WANDS, LANCES

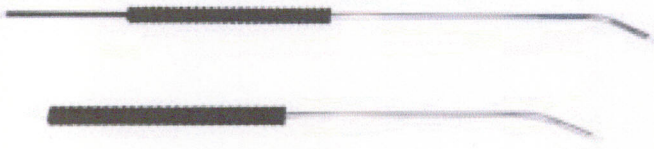			
WA20-1	1Ft wand	WA20-5	5Ft wand
WA20-2.5	2.5Ft wand	WA20-6	6Ft wand
WA20-3	3Ft wand	WA20-7	7Ft wand
WA20-4	4Ft wand	WA20-9	9Ft wand
	WA20-156	<p>DUAL WAND: Full control of high or low pressure with a dual wand , allows operator to turn soap off or on at gun without fear of losing spray tip. All brass body with stainless steel valves and seats.</p> <p>1/4" M x 1/4" F</p>	





SWIVELS

	Part #	Discription
	WA20-162 WA20-178	<p>H.P. SWIVEL: All brass, stainless steel & teflon swivel. Prevents twisting and tangling of hoses. Working pressure 4000 psi.</p> <p>3/8" F x 3/8" M model 1/4" F x 1/4" F model</p>


THERMAL RELIEF VALVES

	Part #	Discription
	WA20-180	<p>THERMAL RELIEF VALVE: Protect your pump from over heating with a thermal relief valve. This unit comes is 3/8in size and has a 140deg temperature setting.</p>
	WA20-172 WA20-173	<p>THERMAL RELIEF VALVES: Protect your pump from over heating with a thermal relief valve. These units come for either 140deg or 170deg temperture settings and have a 90deg discharge.</p> <p>1/2in 140deg thermal relief valve 1/2in 170deg thermal relief valve</p>

FILTERS


	Part #	Discription
	WW05-103	INLET WATER SCREEN: Inlet water screen. A must for every pressure washer.
	WA20-161	INLET STRAINER: Inlet chemical strainer for all foamers , high and low pressure soap injectors.
	WA20-167	WATER INLET FILTER: Plastic body with 1" stainless steel filter. Ideal for clean water to all pressure washers. Max. 170 PSI , 10 GPM , 200F 1/2"F x 1/2"M
	WA20-166	ROTORY NOZZLE INLINE FILTER: Inlet water filter for rotary nozzles. Increases the working life of a rotary nozzle. Max. 5000 PSI , 8 GPM , 212F

TACH & HOUR METER , PUMP OIL

	Part #	Discription
	WA20-164	DIGITAL TACH & HOURMETER: Tach shows RPM of gas motor. Hour meter keeps track of use. Easy to install , great for keeps records for maintenance.
Specially Formulated With: Anti-Wear Agents Anti-Foaming Agents Anti-Moisture Agents Anti-Oxidation Agents Rust Inhibitors	WW23-102	H.D. PRESSURE WASHER PUMP OIL: For use in Water Wacker pressure washer pumps only. NOT for use in combustion engines or pumps using synthetic oils. USE: Fill crankcase to required levels. Change initial oil after first 50 HOURS Then change oil every 3 months or at every 500 Hour intervals.

HOSE REELS

Max Temp 325 F Max Pressure 4000PSI

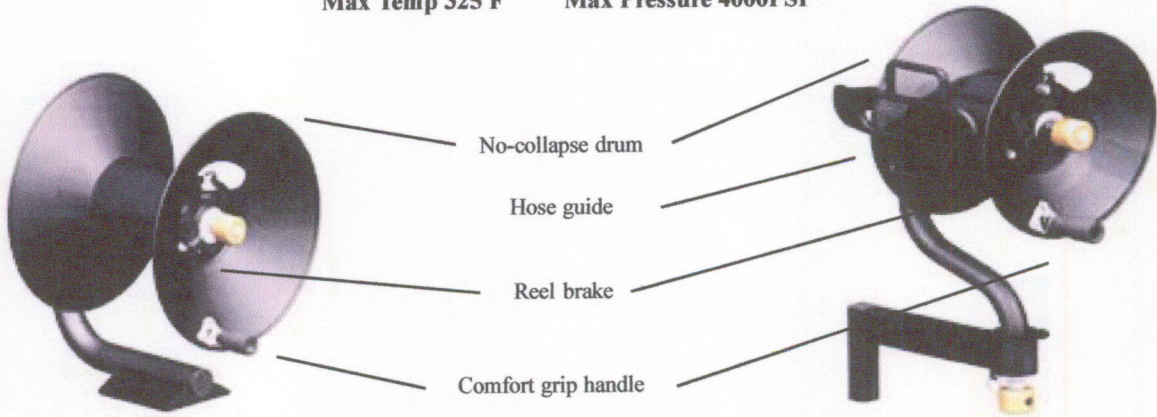

(hand wind.)
Rapid Reel

Model #

WA20-300 100Ft Model (Shown) *309.52*
 (Shown with WA20-330 Universal Bracket installed) *7153*
 WA20-305 200Ft Model

Model #

WA20-310 100Ft Model (Shown)
 WA20-315 200Ft Model

WA15-140-1 100' Hose claw quick connectors 227.60


Optional mounting brackets are available for both reels.

WA20-330	Universal Bracket	WA20-350	90deg Support Arm
WA20-335	Hot Unit Bracket	WA20-355	Vertical Support
WA20-340	Cold Unit Bracket	WA20-360	45deg Support
WA20-345	Cold Unit Handle Bracket		

DOWN DRAFT DIVERTER

Part #


Discription

		A must for any inside hot installation prevents air from coming down the stack and onto the coil. This saves the coil from freezing during cold weather.
	WA20-174 WA20-176	7in Down draft diverter 9in Down draft diverter

RAIN CAP

Part #

Discription

		A must for mobile hot units. When used in a outside enviroment.
	WA20-175 WA20-177	7in Rain cap 9in Rain cap

FLAT SURFACE CLEANER

MODEL FSC-24

Easy grip trigger handle.

Epoxy coated flip-over handle for quick easy direction change

Polyethylene heavy-duty reinforced frame for long life and rust free.

Precision machined balanced stainless steel spray bar.



2 Piece handle with large wing nuts for easy fold down.

Stainless steel H.P. swivel with stainless steel mounting plates top and bottom

8" Semi-pneumatic wheels for stability.

Full 24" wide wheel base.



Easy fold-down handle for transportation or storage.



Hitch pins & quick coupler allow fast, easy removal of handle.

Tough durable, corrosion resistant frame.



This has to be the easiest and fastest way to pressure wash large flat surfaces. The FSC24 has a stainless steel swivel that is rated to handle 4000psi at 2000rpm and temperatures up to 200F. The FSC24 tracks straight and is so easy to handle that you can run it with one hand. If you have sidewalks, patios, shop floors, driveways, shopping mall walkways or large concrete areas to clean, this is the fastest, neatest and easiest way to get the job done. The FSC24 will do most any job in 20% of the time that a standard gun and wand would take, using less water, doing a better job (no zebra striping) and leaving the operator less fatigued.

Distributor:

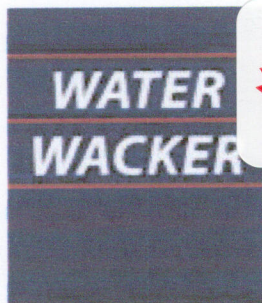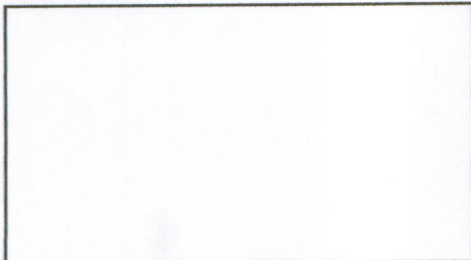

F.A.E. SALES & SERVICE (2007) LTD.

#3, 20120 - 102B AVENUE
LANGLEY, BC V1M 3G9
Phone (604) 888-3671 Fax (604) 888-6815

Barrie, Ontario, L4M 6E7
Ph: (705) 726-6774 / Fax: (705) 726-7010
Manufactured and Distributed by
F.A.E. SALES & SERVICE LTD.